


Suction Point Adaptors Aluminium

Scope of Use / Specification Sheet

Suction point adaptors (or large bore adaptors) are used to draw large volumes of water from tanks external and underground. These are used in high risk buildings so a large volume of water can be drawn from the tanks. These adaptors can have storz usually 125mm or 150mm and can be fitted with Roll Groove to fit to the pipework. They are also available with a 125mm Coventry thread.

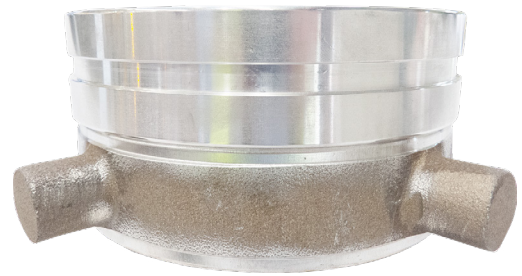

FS2329

Parts List

Order Code	Description
FS2196	100mm 3TPI Female - 100mm BSP Male
FS2201	112mm 3TPI Female - 100mm Roll Groove
FS2198	125mm 3TPI Female - 100mm BSP Male
FS2202	125mm 3TPI Female - 100mm Roll Groove
FS2329	125mm 3TPI Female - 150mm Roll Groove
FS2026	125mm 3TPI Male - 125mm BSP Male
FS2027	125mm 3TPI Male - 150mm BSP Male
FS2330	150mm 3TPI Male - 150mm BSP Male

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500. For further Scope of Use, please visit matthewsfirealarm.com.au/brochures